



Drywall Plasterboard Edge Bead

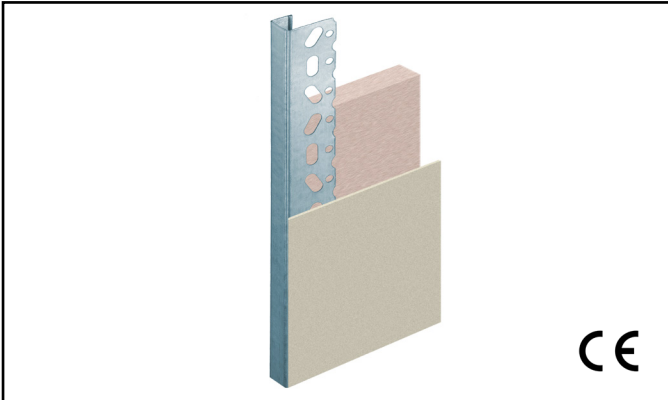

Alpha Drywall Plasterboard Edge Bead

Designed to produce straight edges in drylining applications.

The Alpha Edge plasterboard bead provides the plasterer with the ability to produce true straight edges and give an excellent key for thin coat (skim) plastering.

Fixing all the products is simple and the beads are designed with good resistance to cracking, chipping and impact damage on corners and edges.

Application

A bead to reinforce the edges of plasterboard. Can be fixed either with the 25mm perforated flange on the face of the board by nailing and skimmed over or with the short flange on the board face for a decorative edge finish.

Available as either a 12.5 mm or 15mm depth.

Beads can be cut to size as required using tin-snips and/or a hacksaw. The perforated metal wing provides a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

Internal use only.

COSHH & Health and Safety

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions, gloves should be worn.

TECHNICAL SPECIFICATIONS

Standard:	Material:	Material gauge:	Reaction to Fire:
BS EN14353:2007+A1:2010	Galvanised mild steel DX5AD+Z275 (275mg/m ² Zinc coating)	0.4mm	Class A1

Product Code	Dimension	Quantity (Per Box)	Weight (kgs)
STO6808	3m x 12.5mm	50 lengths	23
STO6809	3m x 15mm	50 lengths	23